


# SERVICE MANUAL

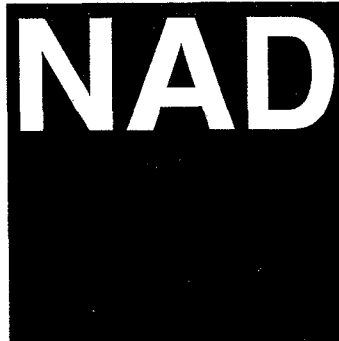

NAD - 00104

## SERVICE SAFETY PRECAUTIONS (UL)

1. Use exact replacement parts for critical locations marked "⚠"
2. Return lead dress to original position and re-install protective covers.
3. Before returning to customer, test for shock hazard; use either method A or B:
  - A. Leakage test "cold":
    1. Unplug the AC cord; turn power switch ON.
    2. Connect one lead of High Voltage Insulation Tester to both prongs of the AC plug.
    3. Touch other lead to all exposed metal parts.
    4. Impedance measurement must be 0.3-5.0 Megohms.
  - B. Leakage test, "live" :
    1. Plug unit directly into the AC outlet: do not use isolation transformer.
    2. Connect one lead of the Leakage Current Tester to earth ground.
    3. Touch other lead to all exposed metal parts.
    4. Leakage measurement must be less than 0.5 milliamps.

**214/216  
STEREO POWER  
AMPLIFIER**

**214/216  
STEREO POWER  
AMPLIFIER**

104

## TABLE OF CONTENTS

SPECIFICATIONS . . . . .	3
REAR PANEL . . . . .	4
FRONT PANEL . . . . .	4
PCB LAYOUT . . . . .	5
EXPLODED VIEW PARTS LIST . . . . .	6
EXPLODED VIEW . . . . .	7
WIRING DIAGRAM . . . . .	8
SCHEMATIC DIAGRAMS	
214 . . . . .	9
216 . . . . .	10
ELECTRICAL PARTS LIST . . . . .	11
ALIGNMENT PROCEDURE . . . . .	14
PACKING DIAGRAM . . . . .	15

NOTE: The "A", given after an item number, refers to the part number for the model 216 only.

# SPECIFICATIONS

Specifications are measured in accordance with EIA Standard RS-490 (IHF T-202) for amplifiers.

## STEREO MODE

		214	216
<b>Continuous Power Output</b> ..... (20Hz/1kHz/20kHz at rated THD)	8 ohms	80W	125W
	4 ohms	120W	200W
<b>Clipping Power at 0.1%THD</b> ..... (1kHz)	8 ohms	95W	150W
	4 ohms	150W	250W
<b>Rated THD</b> (with 80kHz LPF)..... 20Hz/1kHz/20kHz at rated power		0.03%	0.03%
<b>Soft Clipping THD</b> , 1kHz..... Output Reduction		10% 1dB	10% 1dB
<b>Signal/Noise Ratio</b> , 1kHz..... (A-weighted, 220 ohm load) ref. 1W ref. 8 ohms rated power		96.5dB	96.5dB
		115.5dB	117.5dB
<b>Frequency Response</b> .....	20Hz	0~-0.3dB	0~-0.3dB
	20kHz	-0.2~-0.8dB	-0.2~-0.8dB
<b>Input Sensitivity</b> , 1kHz..... (Rated output into 8 ohms)		895±30mV	1120±40mV
<b>Channel Separation</b> .....	1kHz	75dB	75dB
	10kHz	58dB	58dB
<b>Damping Factor</b> ..... (at 50Hz/8 ohms)		200	200
<b>Dynamic Power</b> .....	8 ohms	110W	170W
	4 ohms	180W	280W
	2 ohms	250W	400W

## BRIDGE MODE


<b>Continuous Power Output</b> ..... (20Hz/1kHz/20kHz at rated THD with 80kHz LPF)	8 ohms	240W	400W
<b>Input Sensitivity</b> ..... (Rated output into 8 ohms)		775±40mV	1000±50mV

## PHYSICAL

<b>Dimensions</b> (Width x Height x Depth).....	435 x 128 x 370mm	435 x 146 x 370mm
<b>Gross weight</b> .....	12.5kg (27.5lbs)	15.5kg (34.1lbs)
<b>Power consumption at 120, 220 or 240VAC, 50/60Hz</b> .....	384VA	540VA

**WARNING: TO PREVENT FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.**

## FRONT PANEL

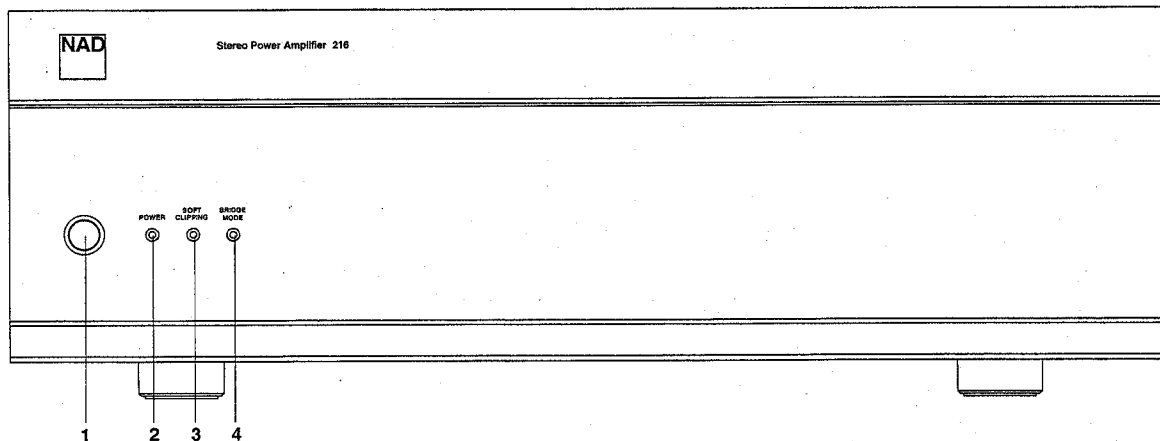

1. POWER Switch
2. POWER Indicator
3. SOFT CLIPPING Indicator
4. BRIDGE MODE Indicator




The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure, that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user of the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.


## REAR PANEL

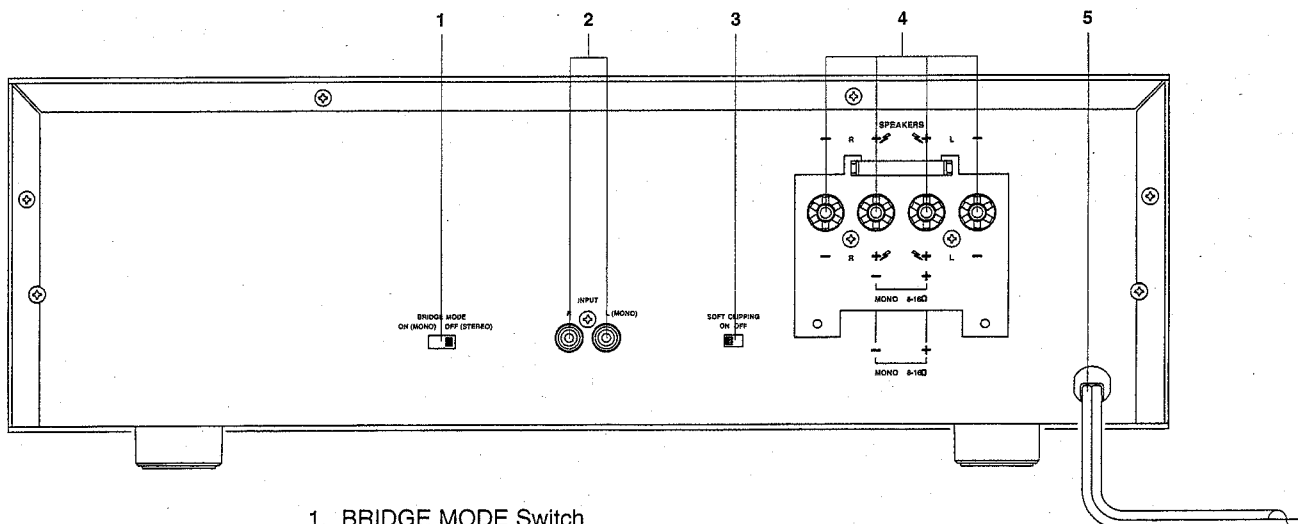


1. BRIDGE MODE Switch
2. INPUT Jacks
3. SOFT CLIPPING Switch
4. SPEAKER OUTPUT Terminals
5. AC POWER CORD

## PCB LAYOUT


## LEFT CHANNEL

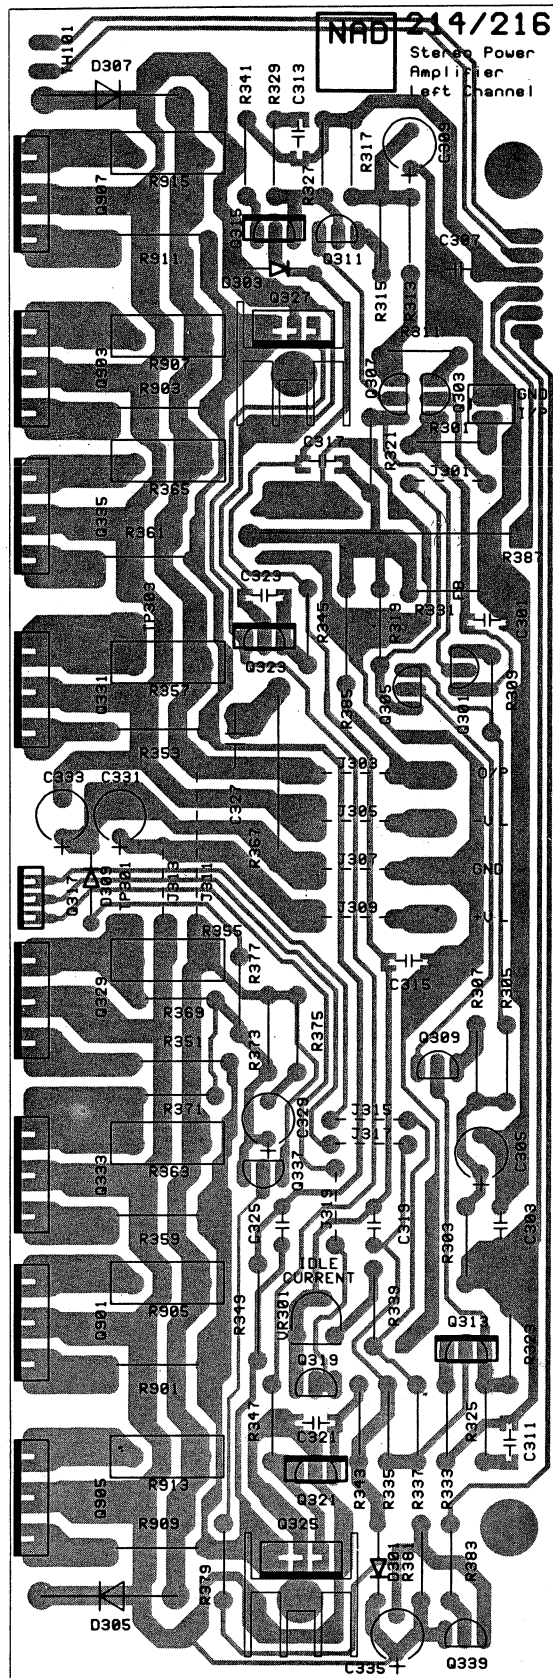


**SPEAKER**

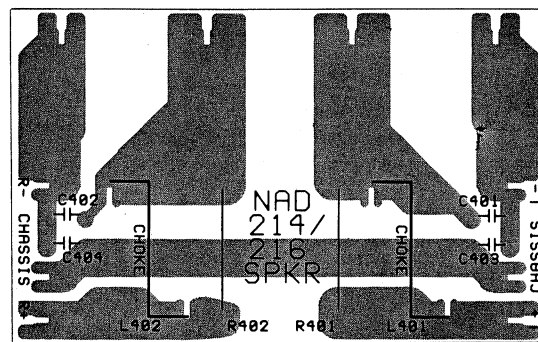


## MAINS

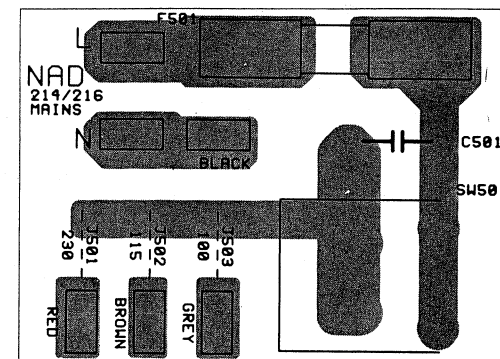

**LED**

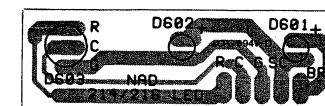

## RIGHT CHANNEL

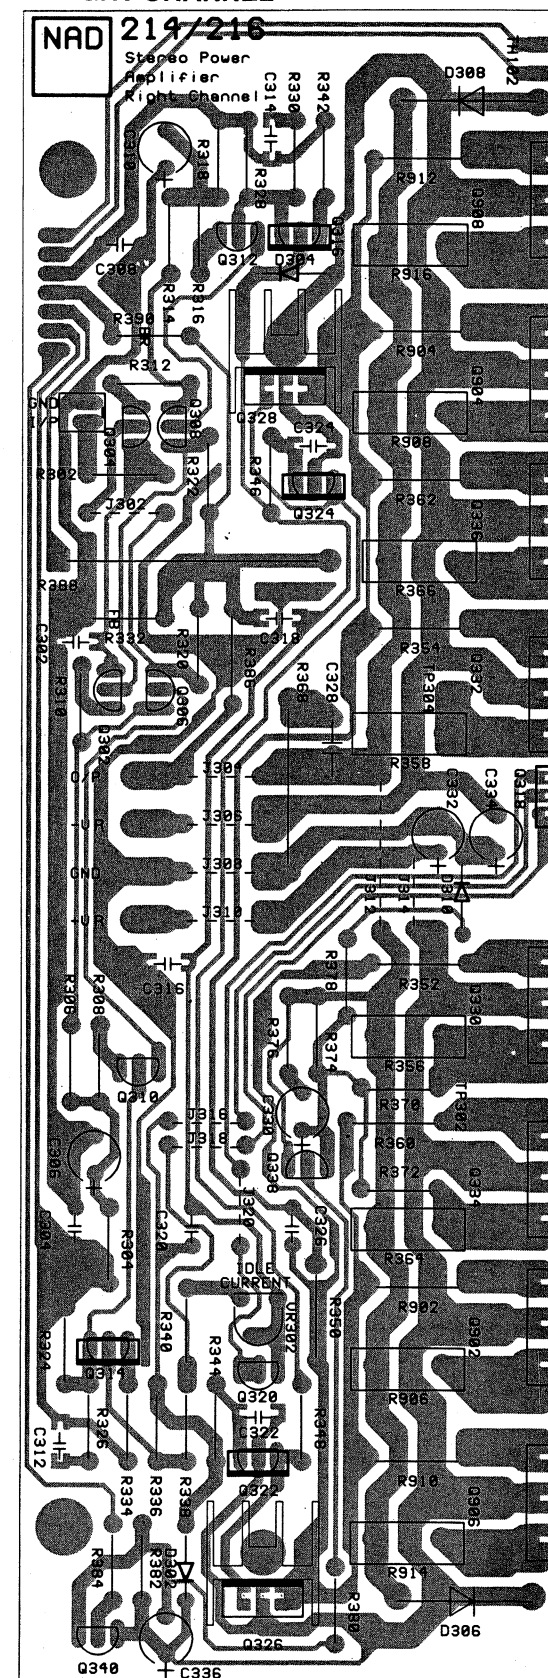


EXPLODED VIEW PARTS LIST

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	N14619601-1	Fascia 214	1
1 A	N14620601-1	Fascia 216	1
2	N14023250-1	Subfascia 214	1
2 A	N14023350-1	Subfascia 216	1
3	N14023270-1	Base Plate	1
4	N14023290-1	Subchassis	1
5	N14023300-0	Access Cover	2
6 *AH	N14023260-1	Rear Panel 214 AH	1
6 *C	N14023320-1	Rear Panel 214 C	1
6 A*AH	N14023360-0	Rear Panel 216 AH	1
6 A*C	N14023370-1	Rear Panel 216 C	1
7	N14023280-0	Top Cover 214	1
7 A	N14023380-0	Top Cover 216	1
8	N41519991-0	Bezel	1
9	N41520011-0	Clear LED Lens	3
10	N2437640B-0	Power Button	1
11	N16600600-0	Shrinkage Tube ID=38.1mm 0.07m	1
12	N16600710-0	Sleeve Tube ID=10mm 0.3m	1
13 *C	N21038004-0	Speaker Terminal with Plug C	1
13 *AH	N21038104-0	Speaker Terminal without Plug AH	1
14 A*AH	N41520022-0	UL Box Backplate Pantone 420 Grey AH	1
15 A*AH	N41520031-0	UL Box Saddle AH	1
16 A*AH	N41519981-0	UL Box Cover AH	1
17	N41519951-0	PCB Support (LCBS)	4
18	N17110821-2	214/216 Amp PCB without components	1
19	N31003191-0	Silicon Sheet	8
20	N41321671-0	Transistor Clamp	8
21	N41321661-0	Thermal Mounting Clip	2
22	N54000841-0	Main Heatsink 214	2
22 A	N54000871-0	Main Heatsink 216	2
23	N54000831-0	Heatsink Power Amplifier	4
24	N54000851-0	Heatsink Regulator	2
25	N54000821-1	Heatsink Power Supply 214	1
25 A	N54000901-0	Heatsink Power Supply 216	1
26 *AH	N70093100-1	AC Cord 18AWGx2 UL/CSA SPT-2 AH ⚠	1
26 *B	N70095100-0	AC Cord ASTA BS1363 with 5A Fuse B ⚠	1
26 *B1	N70091190-1	AC Cord SAA AS3112 B1 ⚠	1
26 *C	N70093110-0	AC Cord SEMKO C ⚠	1
27	N41519461-0	Strain Relief Bushing	1
28	N89100055-0	Thermal Breaker UP 7290C	2
29	N18062102-0	Transformer TI-61233with Accessory 214 ⚠	1
29 A	N18062105-0	Transformer TI-61242with Accessory 216 ⚠	1
30	N41322151-0	Transformer Bracket	1
31	N41519411-0	Cushion 130x10x1.0mm	1
32	N41520331-0	Transformer Bushing	1
33	28368075-0	Nut M8x0.75mm 214	1
34	29078070-2000	Bolt Hexagon Head M8x0.75mm - 70mm 214	1
34 A	N41321891-0	Bolt + Nut Hexagon Head BSW 18TPI - 3.5" 216	1
35	28428015-0	Spring Washer M8	1


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
36	41321971-0	Flat Washer M8x22x1.5mm	1
37	28153042-0	Screw M3x4mm	2
38	29004006-3010	Screw M4x0.5x6mm with Flat Washer	6
39	29084012-3400	Screw Hexagon Socket Head 4x12mm Blk	8
40	29542606-0000	Screw BT 2.6x6mm	8
41	29543006-0000	Screw B-Tite 3x6mm Yel.Zn	17
42	29543006-3000	Screw B-Tite 3x6mm Blk.Zn	6
43	29443008-3000	Screw S-Tite 3x8mm Blk	2
44	29503008-3000	Screw Tapping 3x8mm	8
45	29543008-3000	Screw B-Tite 3x8mm Blk.Zn	11
46	29543010-3000	Screw B-Tite 3x10mm Blk.Zn	12
47	29543510-0000	Screw B-Tite 3.5x10mm Yel.Zn	1
48	29503516-3100	Screw B-Tite 3.5x16mm	22
49	28423367-0	Metal Washer ID=3.3mm OD=6.7mm	4
50 A	N18080110-0	Ferrite Core 33RH15.5x28.5x7.3 216	1
51	N41519371-1	Rubber Foot	4



# EXPLODED VIEW

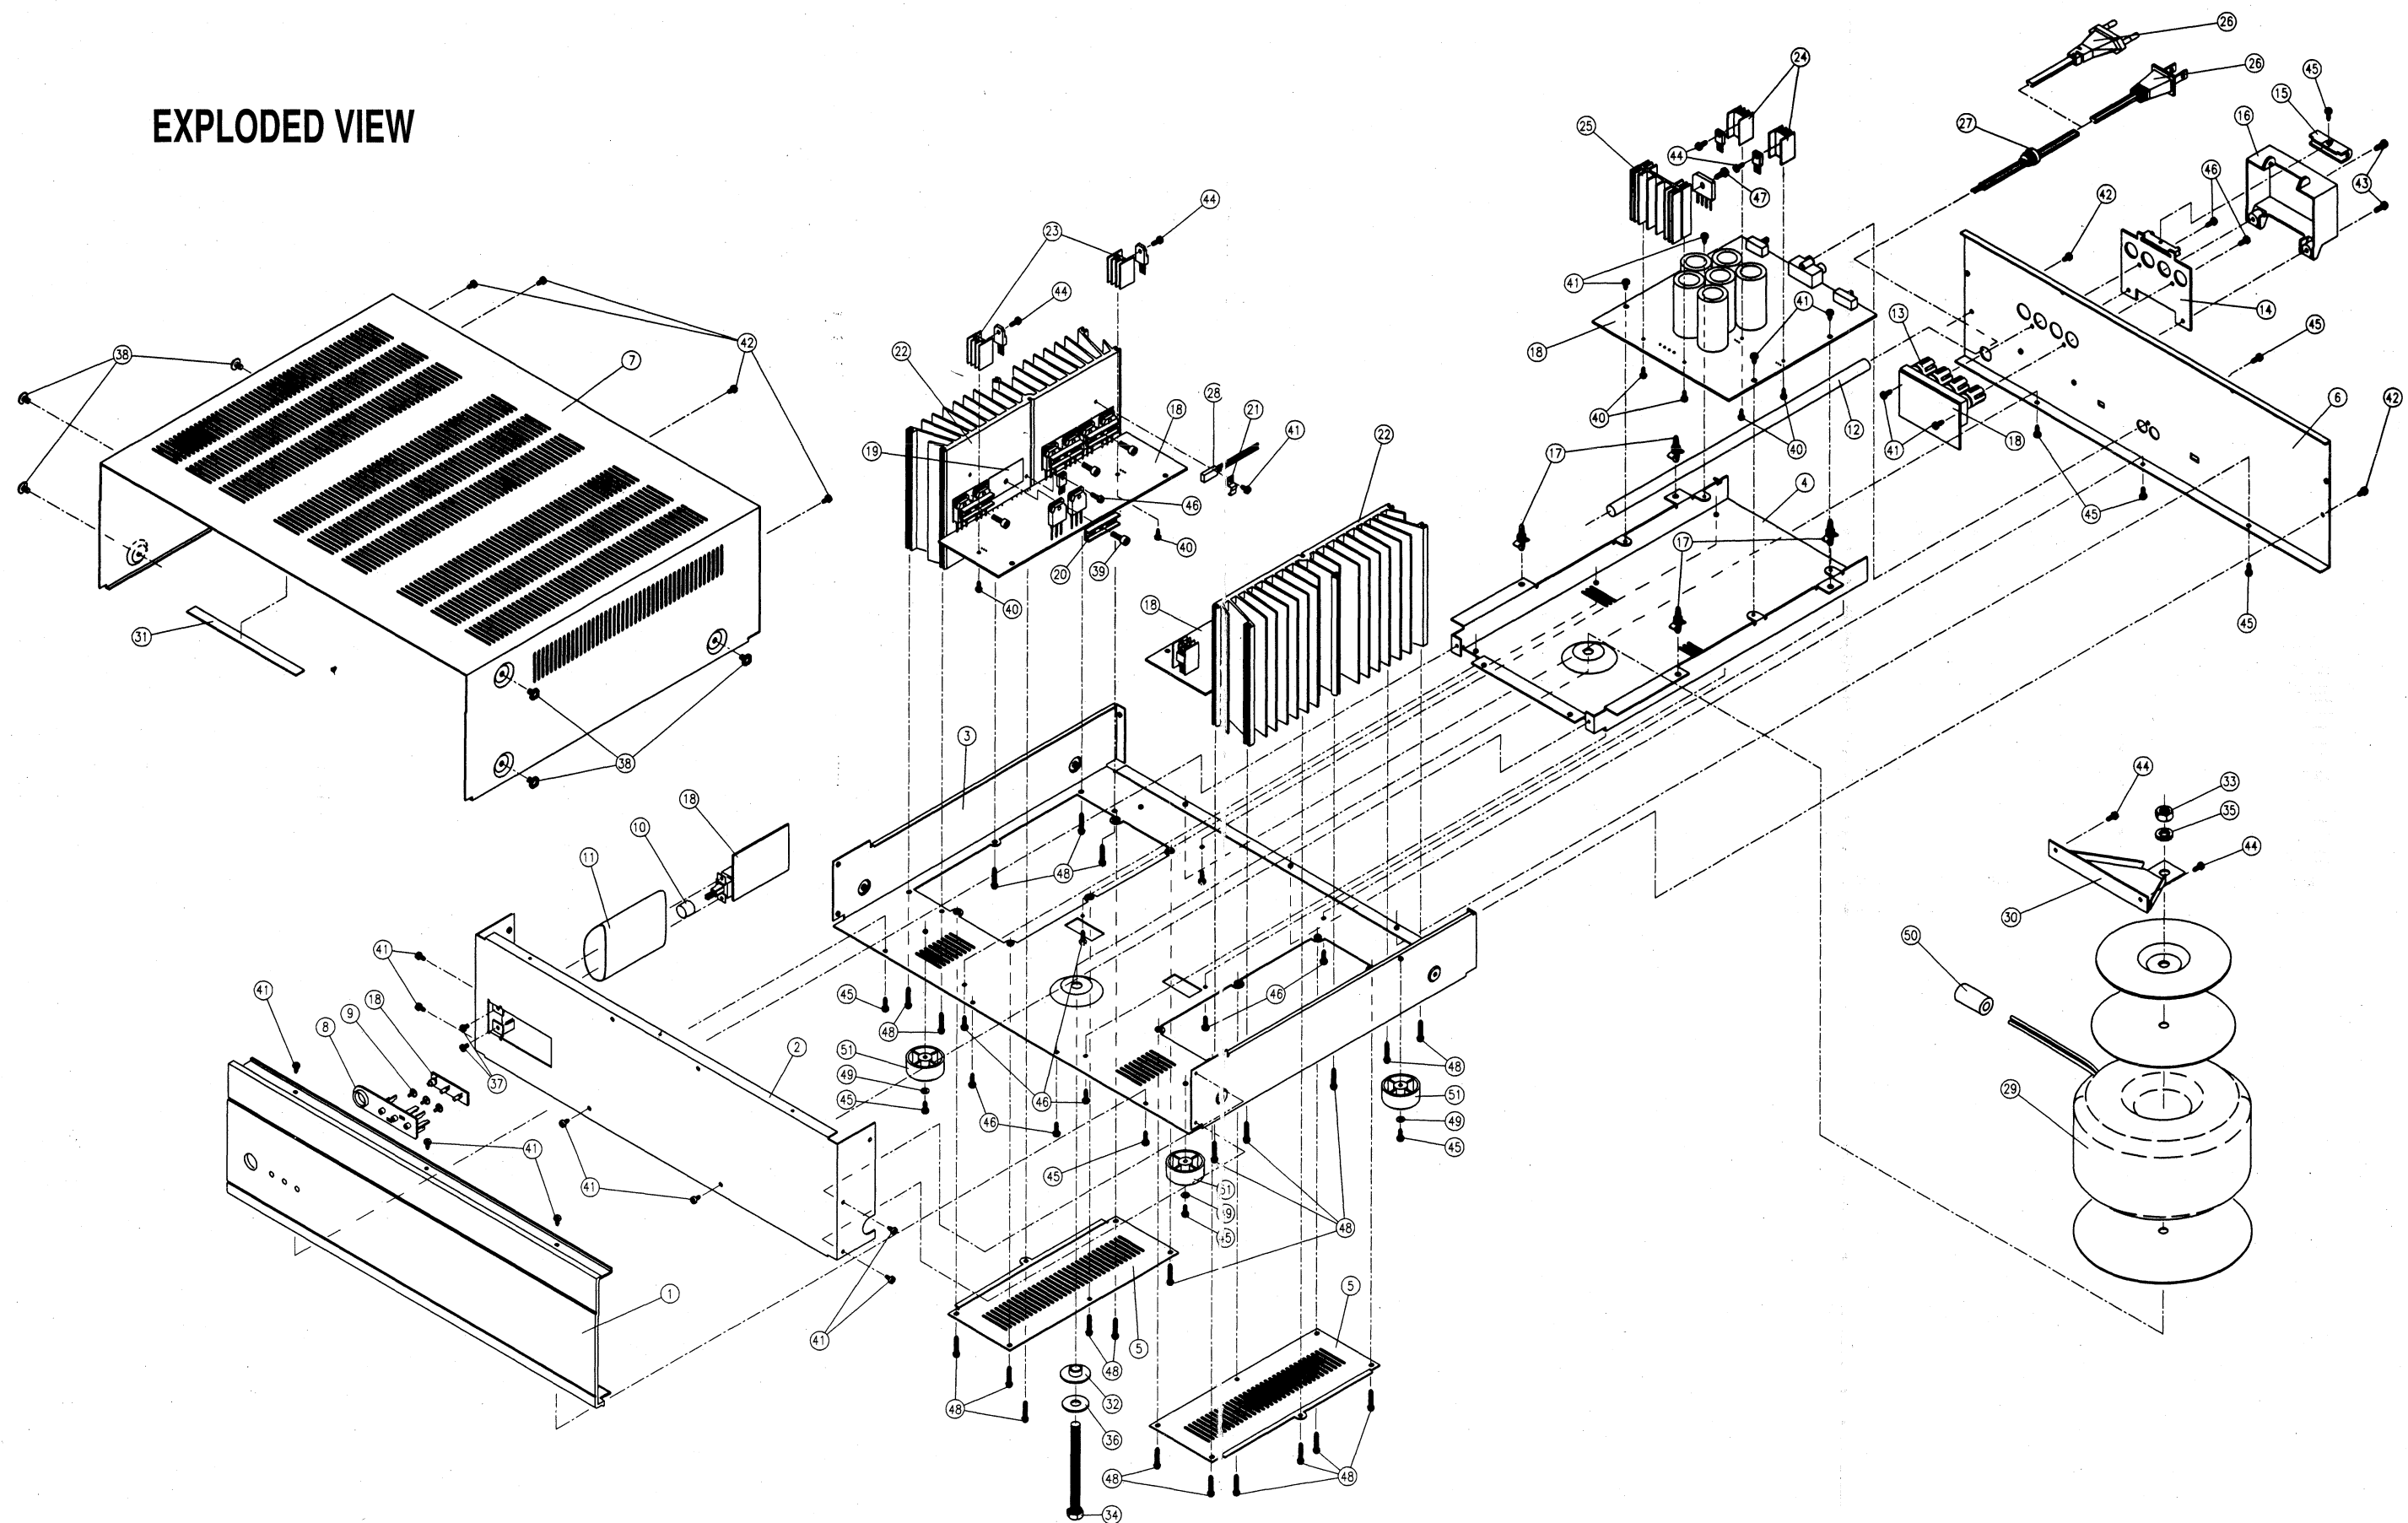


# WIRING DIAGRAM

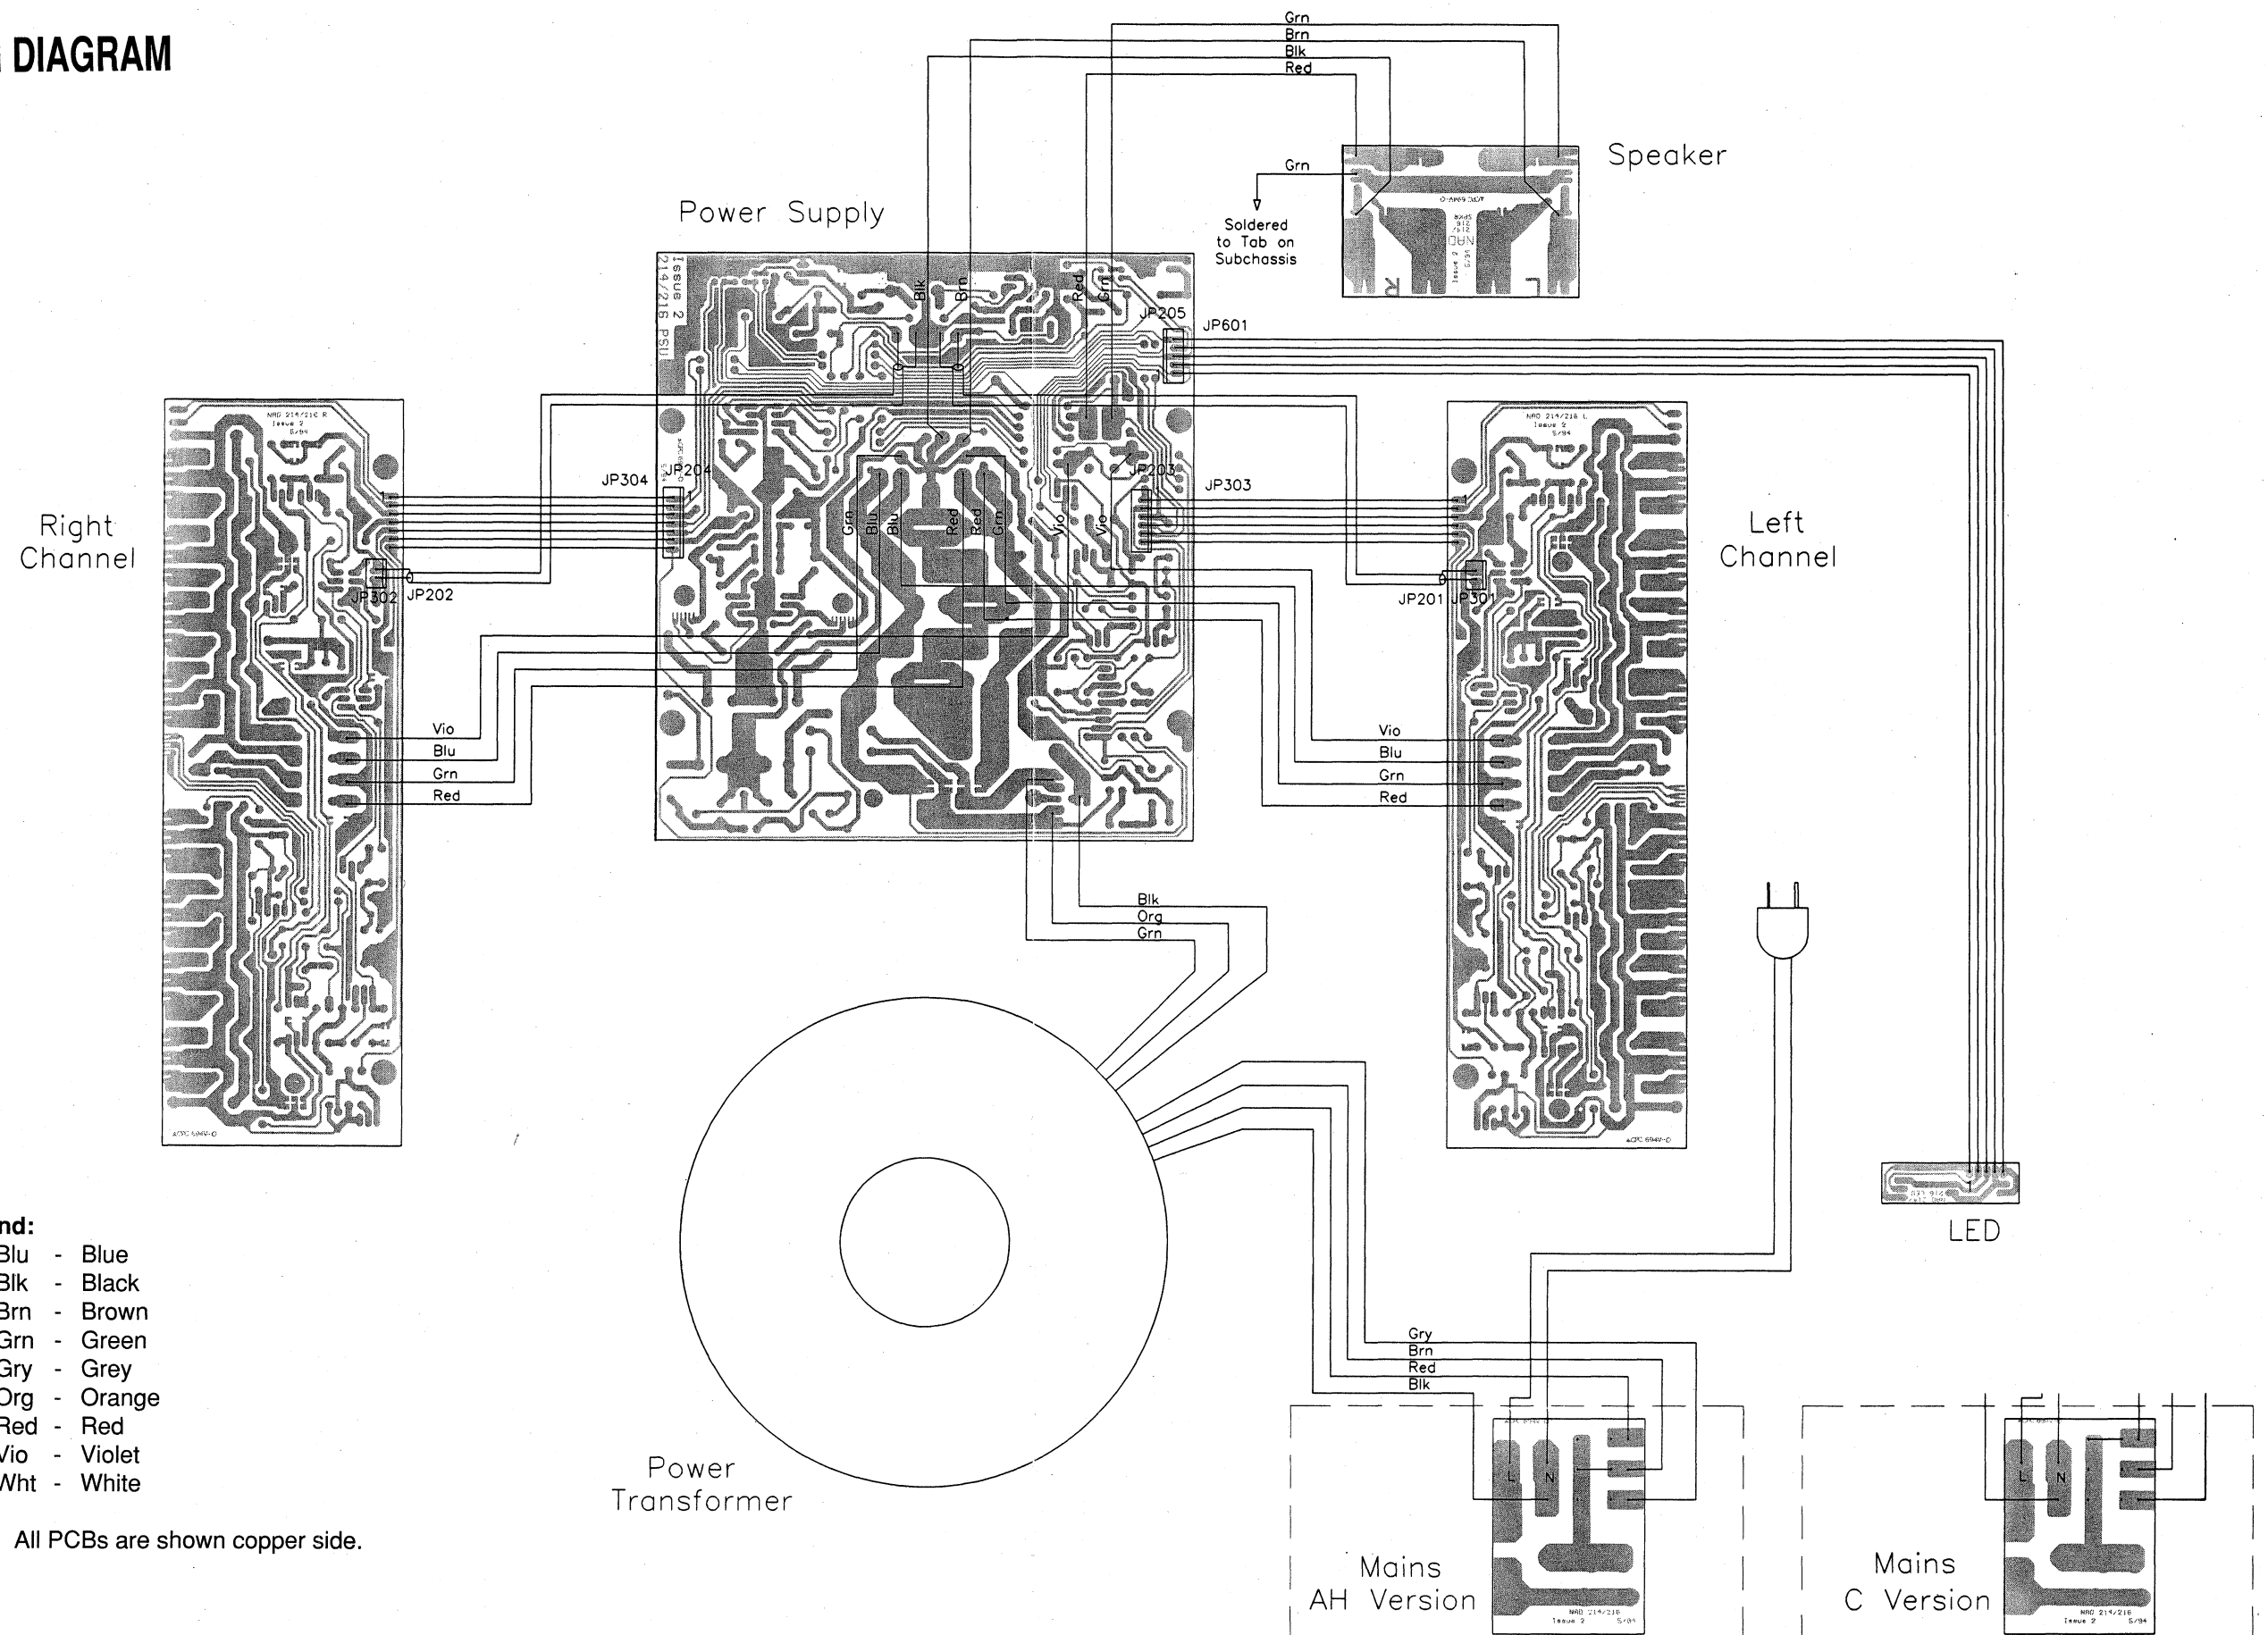



# SCHEMATIC DIAGRAM

## 214 POWER AMPLIFIER

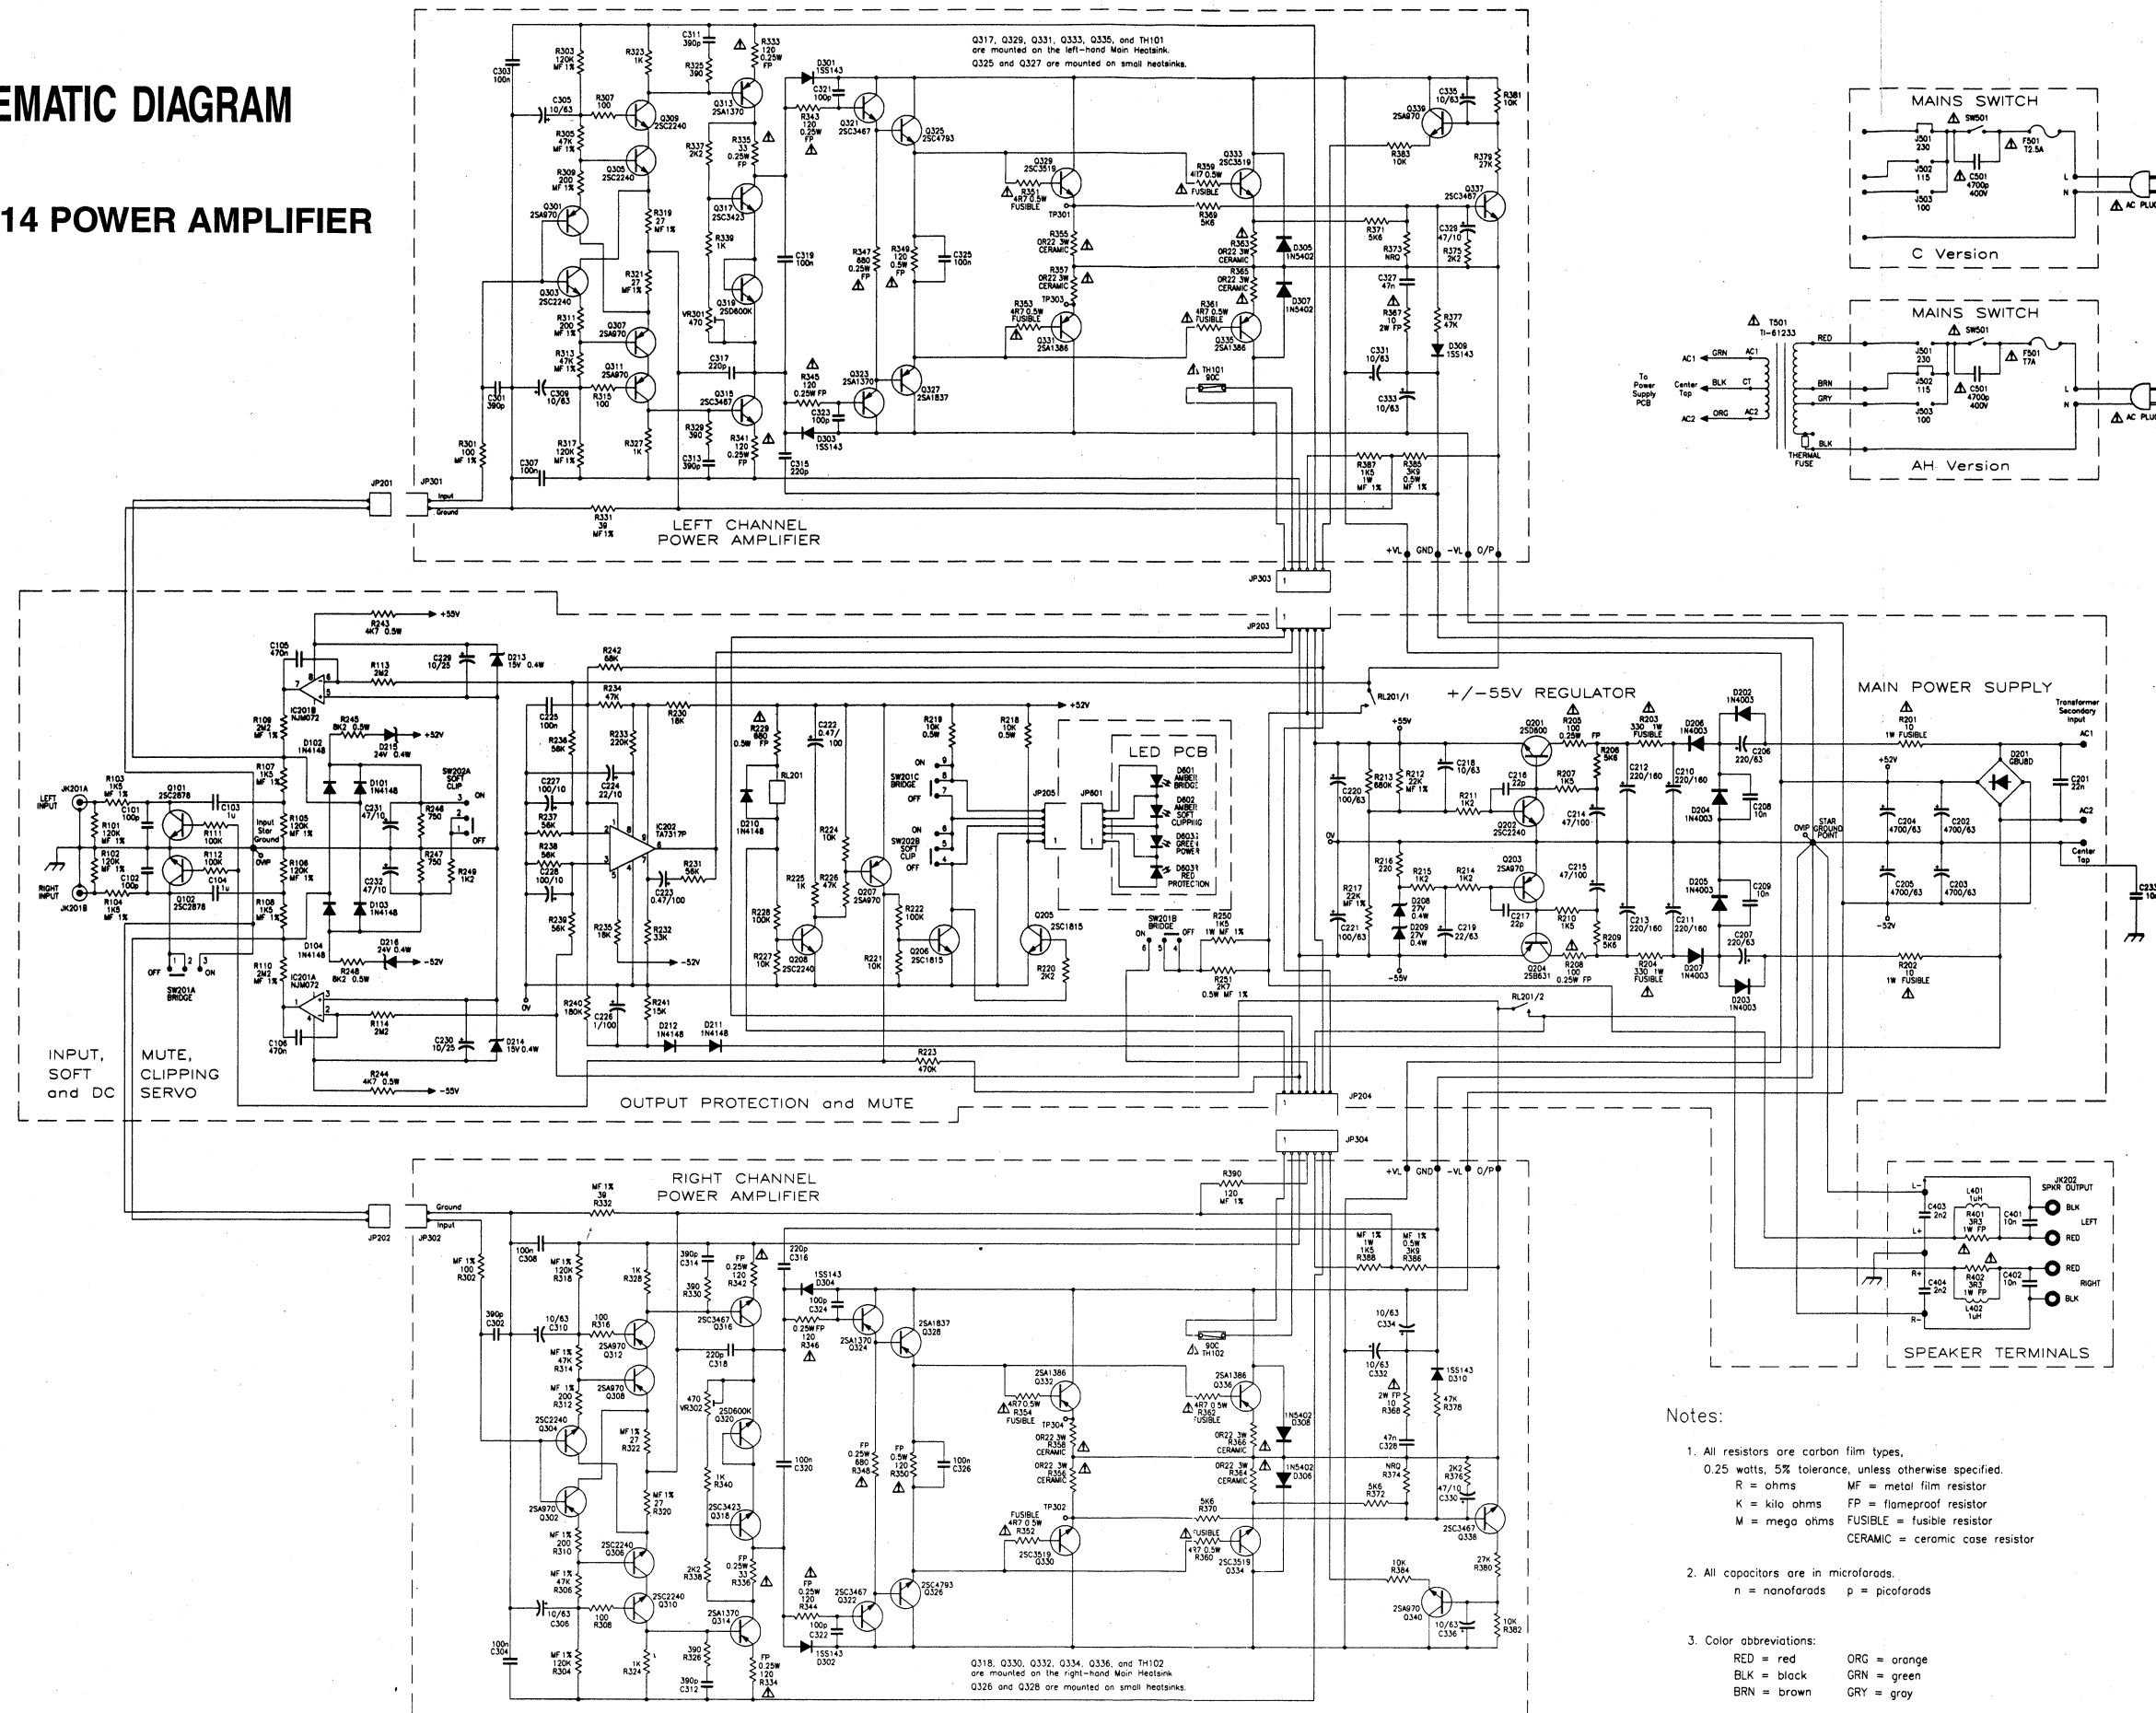

### Notes:

- All resistors are carbon film types, 0.25 watts, 5% tolerance, unless otherwise specified.  
R = ohms      MF = metal film resistor  
K = kilo ohms      FP = flameproof resistor  
M = mega ohms      FUSIBLE = fusible resistor  
CERAMIC = ceramic case resistor
- All capacitors are in microfarads.  
n = nanofarads      p = picofarads
- Color abbreviations:  
RED = red      ORG = orange  
BLK = black      GRN = green  
BRN = brown      GRY = gray

A0712  
NJM072

TA7317P

2SA1386  
2SC3519


2SA1837  
2SC4793

2SA1478  
2SB631  
2SC3423  
2SC3788  
2SD600K

2SA970  
2SC1815  
2SC2240  
2SC2878

2SA1370  
2SC3467

## 216 POWER AMPLIFIER

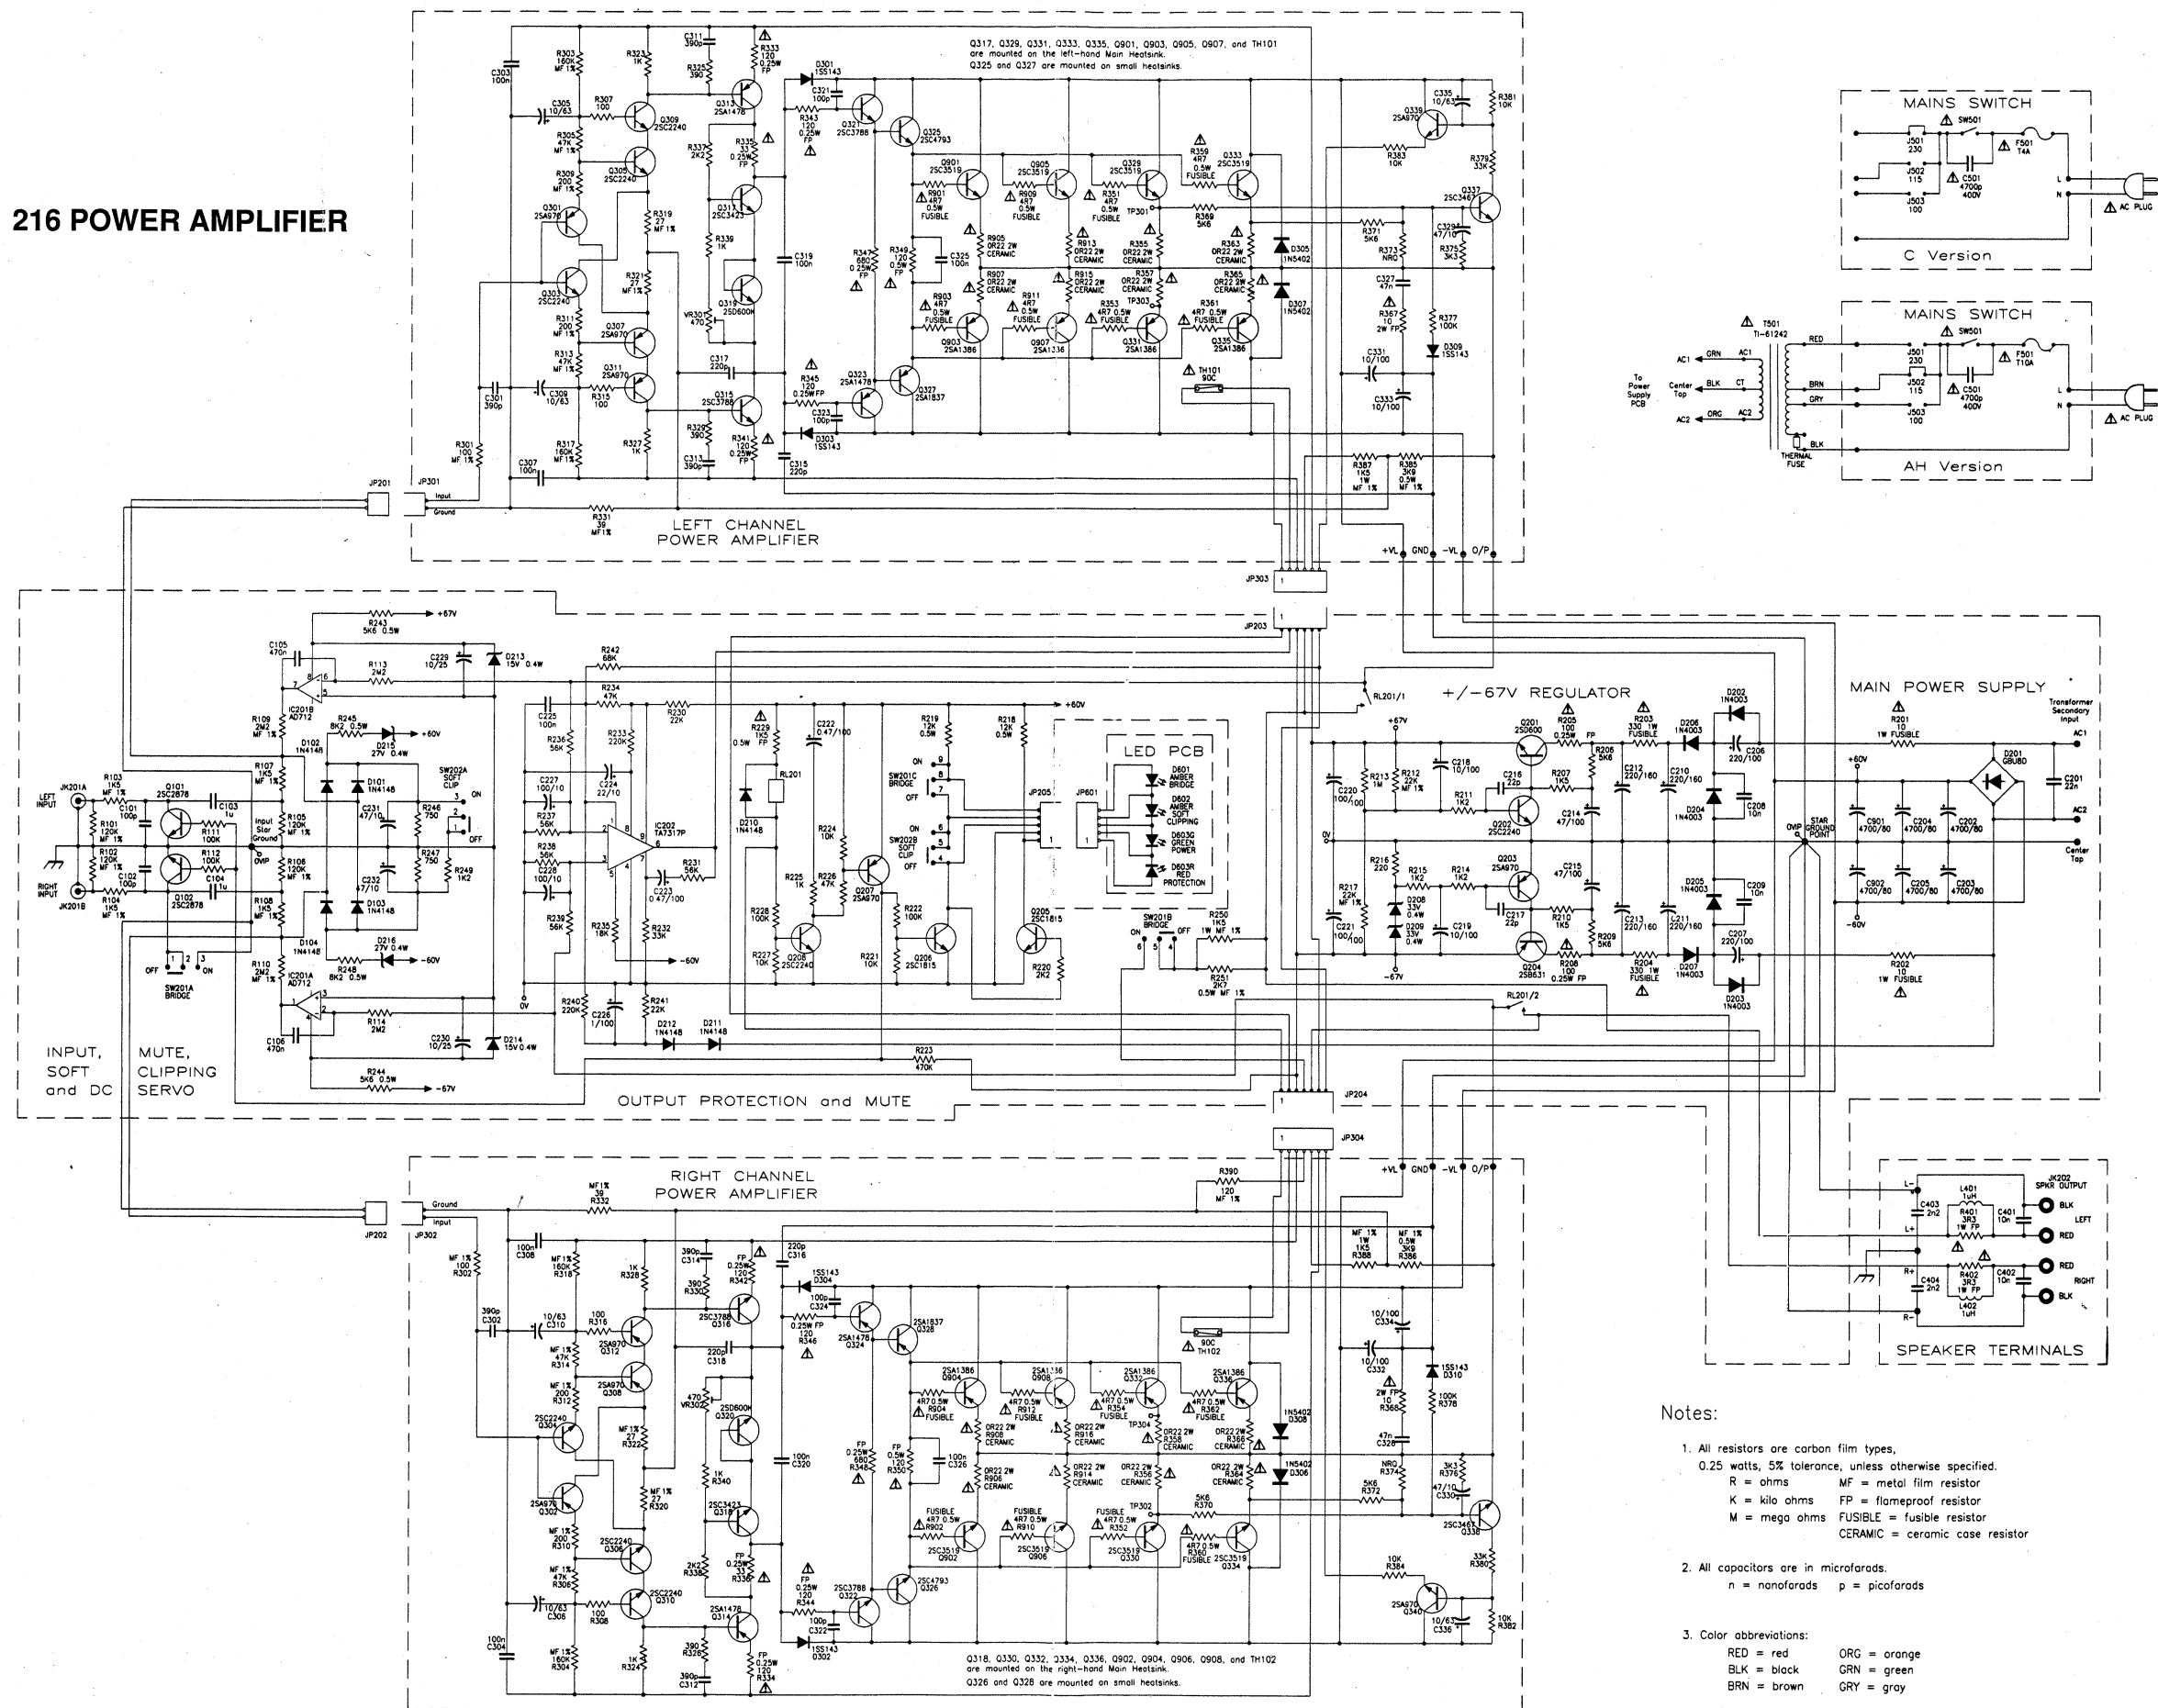

# ELECTRICAL PARTS LIST

SYMBOL NO.	PART NUMBER	DESCRIPTION					REMARKS
C101, C102	N158R101J-5-IQ	Capacitor, Polystyrene	250V	100pF	±5%		
C103, C104	153I105K-9-NL	Capacitor, Mylar	63V	1uF	±10%		
C105, C106	153I474K-9-NL	Capacitor, Mylar	63V	0.47uF	±10%		
C201	153R223M-9-NL	Capacitor, Mylar	250V	0.022uF	±20%		
C202, C203	N89100057-0	Capacitor, Electrolytic	63V	4700uF	±20%		214
C202, C203 A	89100062-0	Capacitor, Electrolytic	80V	4700uF	±20%		216
C204, C205	N89100057-0	Capacitor, Electrolytic	63V	4700uF	±20%		214
C204, C205 A	89100062-0	Capacitor, Electrolytic	80V	4700uF	±20%		216
C206, C207 A	157H227M-5-S&	Capacitor, Electrolytic	100V	220uF	±20%		216
C206, C207	N157I227M-5-S9	Capacitor, Electrolytic	63V	220uF	±20%		214
C208, C209	153R103M-9-NL	Capacitor, Mylar	250V	0.01uF	±20%		
C210, C211	N89100056-0	Capacitor, Electrolytic	160V	220uF	±20%		
C212, C213	N89100056-0	Capacitor, Electrolytic	160V	220uF	±20%		
C214, C215	157H476M-5-S5	Capacitor, Electrolytic	100V	47uF	±20%		
C216, C217	15CG220J-7-IJ	CTC	0/30	22pF	±5%		
C218, C219 A	157H106M-5-LU	Capacitor, Electrolytic	100V	10uF	±20%		216
C218	N157I106M-5-IU	Capacitor, Electrolytic	63V	10uF	±20%		214
C219	N157I226M-5-IU	Capacitor, Electrolytic	63V	22uF	±20%		214
C220, C221 A	157H107M-5-X9	Capacitor, Electrolytic	100V	100uF	±20%		216
C220, C221	N157I107M-5-SX	Capacitor, Electrolytic	63V	100uF	±20%		214
C222, C223	N157H474M-5-IU	Capacitor, Electrolytic	100V	0.47uF	±20%		
C224	157C226M-5-IU	Capacitor, Electrolytic	10V	22uF	±20%		
C225	153H104M-9-NL	Capacitor, Mylar	100V	0.1uF	±20%		
C226	N157H105M-5-IU	Capacitor, Electrolytic	100V	1uF	±20%		
C227, C228	157C107M-5-IU	Capacitor, Electrolytic	10V	100uF	±20%		
C229, C230	157E106M-5-IU	Capacitor, Electrolytic	25V	10uF	±20%		
C231, C232	157C476M-5-IU	Capacitor, Electrolytic	10V	47uF	±20%		
C233	N150F103K-5-UU	Capacitor, Ceramic	50V	0.01uF	±10%		214
C301, C302	N158F391J-5-IQ	Capacitor, Polystyrene	50V	390pF	±5%		
C303, C304	153H104M-9-NL	Capacitor, Mylar	100V	0.1uF	±20%		
C305, C306	157I106M-5-IU	Capacitor, Electrolytic	63V	10uF	±20%		
C307, C308	153H104M-9-NL	Capacitor, Mylar	100V	0.1uF	±20%		
C309, C310	157I106M-5-IU	Capacitor, Electrolytic	63V	10uF	±20%		
C311, C312	N158F391J-5-IQ	Capacitor, Polystyrene	50V	390pF	±5%		
C313, C314	N158F391J-5-IQ	Capacitor, Polystyrene	50V	390pF	±5%		
C315, C316	N158K221J-5-IQ	Capacitor, Polystyrene	150V	220pF	±5%		
C317, C318	N158K221J-5-IQ	Capacitor, Polystyrene	150V	220pF	±5%		
C319, C320	153H104M-9-NL	Capacitor, Mylar	100V	0.1uF	±20%		
C321, C322	N158R101J-5-IQ	Capacitor, Polystyrene	250V	100pF	±5%		
C323, C324	N158R101J-5-IQ	Capacitor, Polystyrene	250V	100pF	±5%		
C325, C326	153H104M-9-NL	Capacitor, Mylar	100V	0.1uF	±20%		
C327, C328	153H473K-9-SW	Capacitor, Mylar	100V	0.047uF	±10%		
C329, C330	157C476M-5-IU	Capacitor, Electrolytic	10V	47uF	±20%		
C331, C332 A	157H106M-5-LU	Capacitor, Electrolytic	100V	10uF	±20%		216
C331, C332	N157I106M-5-IU	Capacitor, Electrolytic	63V	10uF	±20%		214
C333, C334 A	157H106M-5-LU	Capacitor, Electrolytic	100V	10uF	±20%		216
C333, C334	N157I106M-5-IU	Capacitor, Electrolytic	63V	10uF	±20%		214
C335, C336	157I106M-5-IU	Capacitor, Electrolytic	63V	10uF	±20%		
C401, C402	153R103M-9-NL	Capacitor, Mylar	250V	0.01uF	±20%		
C403, C404	15CG222J-7-IJ	CTC	0/30	2200pF	±5%		
C501	N89100049-0	CAP	400V	4700pF	DE7150F472MVA1KC		⚠
C901, C902 A	89100062-0	Capacitor, Electrolytic	80V	4700uF	±20%		216

SYMBOL NO.	PART NUMBER	DESCRIPTION		REMARKS
D101, D102	48041480-2	Diode	1N4148	
D103, D104	48041480-2	Diode	1N4148	
D201	N48400610-0	Diode, Bridge	GBU8D	
D202, D203	N48040030-2	Diode	1N4003	
D204, D205	N48040030-2	Diode	1N4003	
D206, D207	N48040030-2	Diode	1N4003	
D208, D209	N483727V0-2	Diode, Zener	0.5W 27V	214
D208, D209 A	483733V0-2	Diode, Zener	0.5W 33V	216
D210, D211	48041480-2	Diode	1N4148	
D212	48041480-2	Diode	1N4148	
D213, D214	48400510-0	Diode, Zener	0.5W 15V	
D215, D216	N48400620-0	Diode, Zener	0.5W 24V	214
D215, D216 A	483727V0-2	Diode, Zener	0.5W 27V	216
D301, D302	48400590-0	Diode	1SS143	
D303, D304	48400590-0	Diode	1SS143	
D305, D306	N48054020-L	Diode	1N5402	
D307, D308	N48054020-L	Diode	1N5402	
D309, D310	48400590-0	Diode	1SS143	
D601, D602	N37003513-Y	LED Yellow	(L-424YDT) 3mm	
D603	N37003517-RG	LED Red/Green	(L-469HGW)	
F501 A*AH	N51001030-3A	Fuse	T10A 125V/250V (UL/CSA)	⚠ 216AH
F501 *C	N51002530-1B	Fuse	T2.5A 250V IEC (SEMKO/VDE)	⚠ 214C
F501 *AH	N51007030-1A	Fuse	T7A 125V (UL/CSA)	⚠ 214AH
F501 A*C	51200017-0	Fuse	T4A 250V SEMKO/VDE	⚠ 216C
IC201	N31303560-0	IC	NJM072 (D)	214
IC201 A	N31303830-0	IC	AD712 (JN)	216
IC202	N31303530-0	IC	TA7317P	
JK201	N21037902-0	Twin RCA Jack	YKC21-3539	
L401, L402	N18040490-0	Spring Coil	1uH 1/9/16.5	
Q101, Q102	N48600070-5	Transistor	2SC2878 (A, B)	
Q201	N48600740-5	Transistor	2SD600K (E, F)	
Q202	N485240GR-5	Transistor	2SC2240 (G, R)	
Q203	N48600650-5	Transistor	2SA970 (G, R)	
Q204	N48600870-5	Transistor	2SB631K (E, F)	
Q205, Q206	N4851815Y-5	Transistor	2SC1815-Y	
Q207	N48600650-5	Transistor	2SA970 (G, R)	
Q208	N485240GR-5	Transistor	2SC2240 (G, R)	
Q301, Q302	N48600650-5	Transistor	2SA970 (G, R)	
Q303, Q304	N485240GR-5	Transistor	2SC2240 (G, R)	
Q305, Q306	N485240GR-5	Transistor	2SC2240 (G, R)	
Q307, Q308	N48600650-5	Transistor	2SA970 (G, R)	
Q309, Q310	N485240GR-5	Transistor	2SC2240 (G, R)	
Q311, Q312	N48600650-5	Transistor	2SA970 (G, R)	
Q313, Q314	N48600680-5	Transistor	2SA1370 (E)	214
Q313, Q314 A	N48600810-5	Transistor	2SA1478 (E)	216
Q315, Q316	N48600720-5	Transistor	2SC3467 (E)	214
Q315, Q316 A	N48600820-5	Transistor	2SC3788 (E)	216
Q317, Q318	N48600790-5	Transistor	2SC3423 (Y)	
Q319, Q320	N48600740-5	Transistor	2SD600K (E, F)	
Q321, Q322	N48600720-5	Transistor	2SC3467 (E)	214
Q321, Q322 A	N48600820-5	Transistor	2SC3788 (E)	216
Q323, Q324	N48600680-5	Transistor	2SA1370 (E)	214

SYMBOL NO.	PART NUMBER	DESCRIPTION					REMARKS
Q323, Q324 A	N48600810-5	Transistor	2SA1478 (E)				216
Q325, Q326	48601060-5	Transistor	2SC4793				
Q327, Q328	48601050-5	Transistor	2SA1837				
Q329, Q330	N48600730-5	Transistor	2SC3519 (O, P, Y)				
Q331, Q332	N48600690-5	Transistor	2SA1386 (O, P, Y)				
Q333, Q334	N48600730-5	Transistor	2SC3519 (O, P, Y)				
Q335, Q336	N48600690-5	Transistor	2SA1386 (O, P, Y)				
Q337, Q338	N48600720-5	Transistor	2SC3467 (E)				
Q339, Q340	N48600650-5	Transistor	2SA970 (G, R)				
Q901, Q902 A	N48600730-5	Transistor	2SC3519 (O, P, Y)				216
Q903, Q904 A	N48600690-5	Transistor	2SA1386 (O, P, Y)				216
Q905, Q906 A	N48600730-5	Transistor	2SC3519 (O, P, Y)				216
Q907, Q908 A	N48600690-5	Transistor	2SA1386 (O, P, Y)				216
R201, R202	N4718100J-2-F	Resistor	Fusible	10	1W	5%	⚠
R203, R204	N4718331J-2-F	Resistor	Fusible	330	1W	5%	⚠
R205, R208	N4715101J-2-P	Resistor	Flame Proof	100	0.25W	5%	⚠
R229	N4717681J-2-P	Resistor	Flame Proof	680	0.5W	5%	⚠ 214
R229 A	N4717152J-2-P	Resistor	Flame Proof	1K5	0.5W	5%	⚠ 216
R333, R334	4715121J-2-P	Resistor	Flame Proof	120	0.25W	5%	⚠
R335, R336	N4715330J-2-P	Resistor	Flame Proof	33	0.25W	5%	⚠
R341, R342	4715121J-2-P	Resistor	Flame Proof	120	0.25W	5%	⚠
R343, R344	4715121J-2-P	Resistor	Flame Proof	120	0.25W	5%	⚠
R345, R346	4715121J-2-P	Resistor	Flame Proof	120	0.25W	5%	⚠
R347, R348	N4715681J-2-P	Resistor	Flame Proof	680	0.25W	5%	⚠
R349, R350	4717121J-2-P	Resistor	Flame Proof	120	0.5W	5%	⚠
R351, R352	47174R7J-2-F	Resistor	Fusible	4R7	0.5W	5%	⚠
R353, R354	47174R7J-2-F	Resistor	Fusible	4R7	0.5W	5%	⚠
R355, R356	471A022K-5-N	Resistor	Ceramic Case	0R22	3W	10%	⚠ 214
R355, R356 A	4719022K-5-N	Resistor	Ceramic Case	0R22	2W	10%	⚠ 216
R357, R358	471A022K-5-N	Resistor	Ceramic Case	0R22	3W	10%	⚠ 214
R357, R358 A	4719022K-5-N	Resistor	Ceramic Case	0R22	2W	10%	⚠ 216
R359, R360	47174R7J-2-F	Resistor	Fusible	4R7	0.5W	5%	⚠
R361, R362	47174R7J-2-F	Resistor	Fusible	4R7	0.5W	5%	⚠
R363, R364	471A022K-5-N	Resistor	Ceramic Case	0R22	3W	10%	⚠ 214
R363, R364 A	4719022K-5-N	Resistor	Ceramic Case	0R22	2W	10%	⚠ 216
R365, R366	471A022K-5-N	Resistor	Ceramic Case	0R22	3W	10%	⚠ 214
R365, R366 A	4719022K-5-N	Resistor	Ceramic Case	0R22	2W	10%	⚠ 216
R367, R368	4719100J-1-P	Resistor	Flame Proof	10	2W	5%	⚠
R401, R402	N47183R3J-2-P	Resistor	Flame Proof	3R3	1W	5%	⚠
R901, R902 A	47174R7J-2-F	Resistor	Fusible	4R7	0.5W	5%	⚠ 216
R903, R904 A	47174R7J-2-F	Resistor	Fusible	4R7	0.5W	5%	⚠ 216
R905, R906 A	4719022K-5-N	Resistor	Ceramic Case	0R22	2W	10%	⚠ 216
R907, R908 A	4719022K-5-N	Resistor	Ceramic Case	0R22	2W	10%	⚠ 216
R909, R910 A	47174R7J-2-F	Resistor	Fusible	4R7	0.5W	5%	⚠ 216
R911, R912 A	47174R7J-2-F	Resistor	Fusible	4R7	0.5W	5%	⚠ 216
R913, R914 A	4719022K-5-N	Resistor	Ceramic Case	0R22	2W	10%	⚠ 216
R915, R916 A	4719022K-5-N	Resistor	Ceramic Case	0R22	2W	10%	⚠ 216
RL201	N45000130-0	Relay	DEC	DH48D2-0 (M)	DH 2U		
SW201	N52003161-0-01	4PDT Slide Switch	SK-42F28-G6TS				
SW202	N52003171-0-01	DPDT Slide Switch	SK-22F28-G9TS				
SW501	N52003181-0-01	DPST Push Switch	SDDFA3066A				⚠
TH101, TH102	N89100055-0	Thermal Breaker	UP 72	90C			⚠
VR301, VR302	N47564716-3-06	Resistor, Semi-fixed	470	H3 7X7.6	RH0615C		

# ALIGNMENT PROCEDURE

## EQUIPMENT

Digital voltmeter (DVM) switched to 200mV DC range.


## TEST CONDITIONS

Ensure VR301 and VR302 are set to minimum (fully counterclockwise) before first switching on.

Preheat	Minimum five (5) minutes
Load	No load
Input	No signal

## ALIGNMENT

1. Connect DVM across TP301 and TP303, Left Channel.
2. Adjust VR301, Left channel, for a reading of:  
    **214** 20mV  $\pm 1.5$ mV.  
    **216** 18mV  $\pm 1.5$ mV.
3. Connect DVM across TP302 and TP304, Right channel.
4. Adjust VR302, Right channel, for a reading of:  
    **214** 20 mV  $\pm 1.5$ mV.  
    **216** 18mV  $\pm 1.5$ mV.
5. Leave power on for a further five (5) minutes (minimum).
6. Repeat steps 1 to 4.

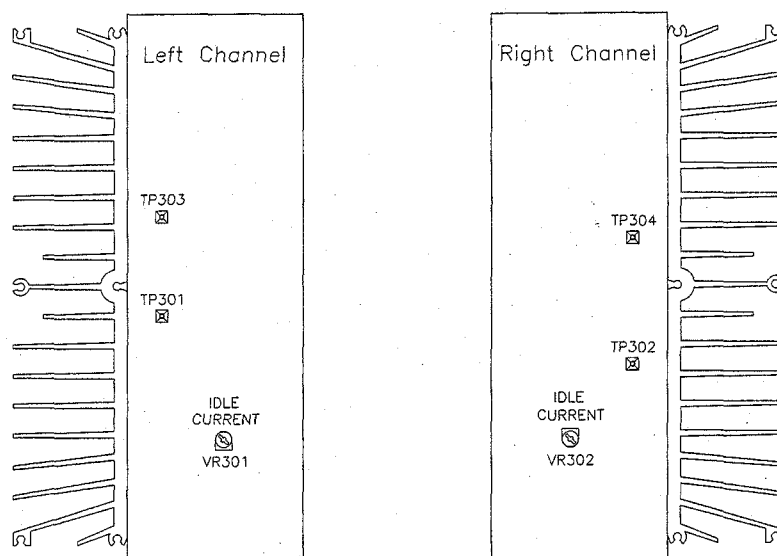


AMPLIFIER ADJUSTMENT POINTS



## PACKING DIAGRAM

ITEM	PART NUMBER	NAME	QTY
52		Unit	1
53	N14971252-0	EPE Bag (214)	1
53 A	N14971162-0	EPE Bag (216)	1
54	N14971072-3	Polybag Unit	1
55	N4901583-0	Polyfoam (214)	2
55 A	N4901643-0	Polyfoam (216)	2
56	N43013535-0	Instruction Manual	1
57 *AH	N30301057-2	Safety Instruction Sheet (AH)	1
58 *AH	N30301056-0	Warranty Card (AH)	1
59	N14971062-0	Polybag Manual	1
60	N14761401-0	Gift Box (214)	1
60 A	N14761600-0	Gift Box (216)	1

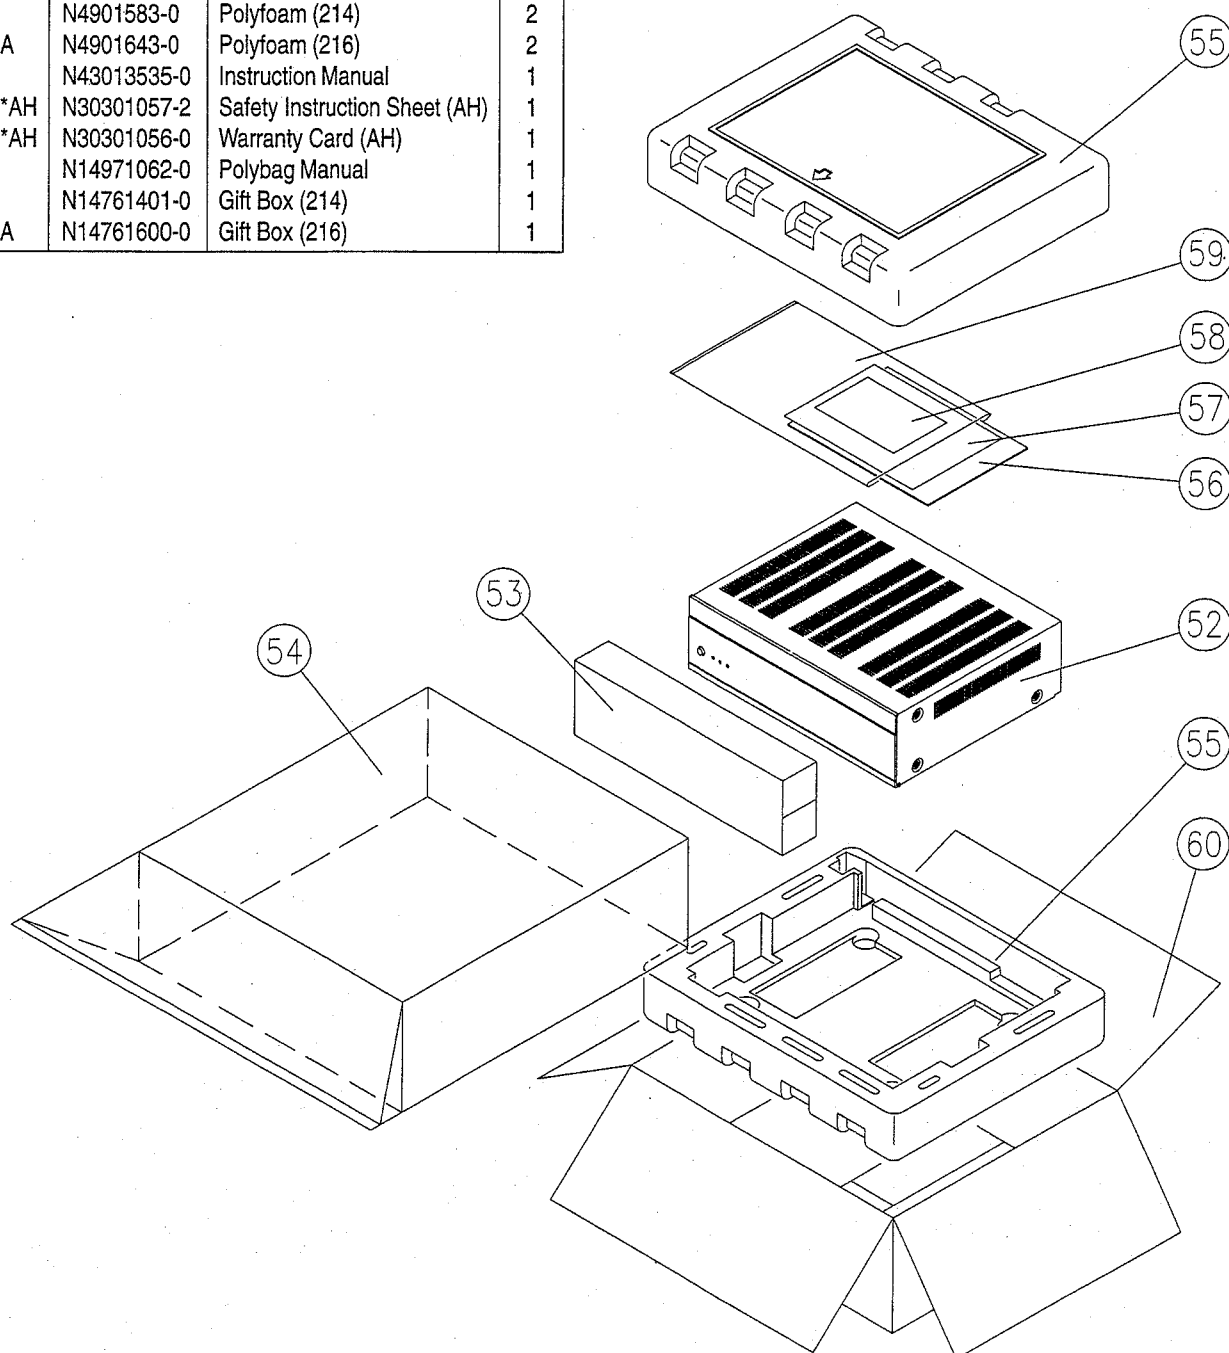

Proprietary information for servicing purposes only. The information herein may not be used commercially without the prior written agreement of NAD Electronics Ltd., London, England.

# SERVICE MANUAL

© NAD 1995

**214/216**  
**STEREO POWER**  
**AMPLIFIER**

**NAD ELECTRONICS**  
LONDON